


N.C.121 Thinner

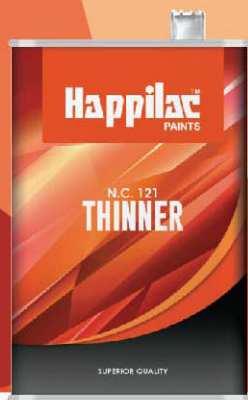

Description

Happilac N.C. 121 Thinner is a high quality thinner for multiple purposes. It is mostly used for thinning the paints where the application method is spray. It retains and enhances the basic properties including gloss, drying time and final finish of the paint.

RECOMMENDED USE

It is recommended for all types of general paints like synthetic enamel, industrial enamel, hammer, chlorinated rubber paint etc.

FEATURES

- Retains original paint properties
- Enhances leveling
- Enhances gloss
- Retains durability

PRODUCT INFORMATION

Appearance	Clear Liquid
Flash Point	32°C
Specific Gravity	0.77 ± 0.02
Odour	Solvent like
Volume Solids (Theoretical)	N/A
Packing	0.91 and 3.64 Liters

METHOD OF USE

Start mixing of Happilac N.C. 121 Thinner in the paint from the minimum quantity and add slowly while stirring. Do not over thin the paint and close the container after use.

Consult Happilac Paints representative for the best suited thinner for the paint.

NOTE: The information in this data sheet is not intended to be exhaustive; any person using the product for any purpose other than that specifically recommended in this data sheet without first obtaining written confirmation from us as to the suitability of the product for the intended purpose does so at their own risk. All advice given or statements made about the product (whether in this data sheet or otherwise) are correct to the best of our knowledge but we have no control over the quality or the condition of the substrate or the factors affecting the use and application of the product. Therefore, unless we specifically agree in writing to do so, we do not accept any liability at all for the performance of the product or for (subject to the maximum extent permitted by law) any loss or damage arising out of the use of the product. We hereby disclaim any warranties or representations, express or implied, by operation of law or otherwise, including, without limitation, any implied warranty of merchantability or fitness for a particular purpose. All products supplied and technical advice given is subject to our Conditions of Sale. You should request a copy of this document and review it carefully. The information contained in this data sheet is liable to modification from time to time in the light of experience and our policy of continuous development. It is the user's responsibility to check with their local representative that this data sheet is updated prior to using the product.

HEALTH & SAFETY

- Must use goggles and gloves at the time of application
- A suitable dust mask must be worn when rubbing down
- Do not smoke while applying paint
- Keep doors and windows fully open to ensure proper ventilation when applying paint
- In case of contact with eyes, rinse immediately with plenty of water and seek medical advice
- In case of contact with skin, remove splashes from skin using soap and water
- Do not breathe spray mist or dust
- Swallowing can result in nausea, vomiting and irritation of gastrointestinal tract
- This container is only for paint use. Do not use it for edible storage
- In the event of an accident, collect spillage using sand or earth
- Do not empty into drains or watercourses
- Toxic to aquatic environment
- Toxic by inhalation. If inhalation causes physical discomfort, move to fresh air. If discomfort persists or any breathing difficulty occurs, seek medical advice and show container label to doctor
- Keep out of reach of children
- Protect from extreme temperatures. Store in a cool and dry place
- Safety data sheet available for professional users on request

WARNING: Scraping/sanding off previously painted surfaces may release hazardous dust or fumes which are highly toxic. Take protective measures thoroughly when rubbing off the old surfaces.

The information provided in this data sheet is accurate and authentic to the best of our knowledge and based on standard tests. However, results may vary due to possible variations in field conditions and application procedures.